

# InterConsole

Professional Hardware Attendant Console


## Highly Functional Panel with 100 DSS Buttons

InterConsole is a professional DSS Console helping operators or receptionists better handling calls and monitoring each line of the system. It provides 100 programmable buttons which can be configured as direct station selector or other functions. Supported by 10 page buttons each presenting 100 programmable buttons, InterConsole can monitor the status of up to 1,000 end points.

Operators or receptionists can use one touch to access or transfer to extensions, trunks, or selected features. The LED of each button shows busy, idle, ringing or held status offering a quick view of the system status. The page button allows operators to switch the display of 100-button at a time quickly.

Associated with the IP phone, InterConsole is a user-friendly expansion improving the process of answering and dispatching phone calls. InterConsole is the ideal hardware console offering efficient attendant solution.



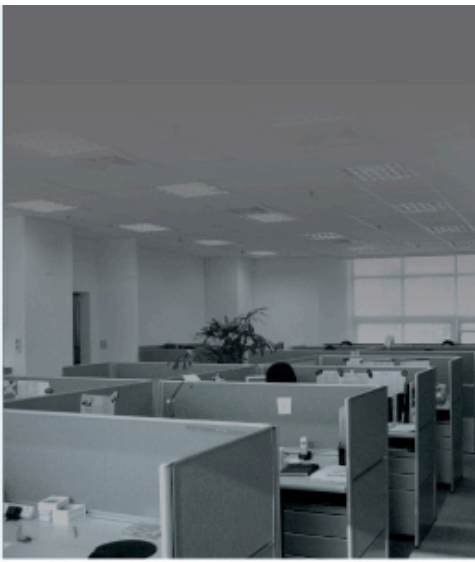

## Key Features

- 100-button DSS/BLF (Direct Station Select/Busy Lamp Field)
- 10 page buttons to switch 100 DSS buttons at a time
- Able to monitor up to 1,000 end points
- Display local or off-premises extensions or CO lines status
- LED indicates status of idle, busy, ringing or being held
- One touch access to extensions, trunks or selected features
- Programmable buttons support system features like conference, park, paging, call pick, speed dialing and night service
- Web-based administration tool
- Adjustable stand for different angles

## Advanced Enterprise IP Telephony Solutions



### Direct Access from DSS Buttons

The programmable buttons and page buttons help operators access or monitor up to 1,000 end points easily and quickly.



### User-Friendly Management Tool

You could configure the programmable buttons or set other features from the web browser conveniently.



This publication is intended for reference purposes only. All product specifications are subject to change without notice. No part of this publication may be reproduced in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission of DSG Technology.

All brand names and product names are trademarks or registered trademarks of their respective companies.

## System Specifications

Capacity	Direct access or monitor up to 1,000 end points
DSS Keys	100 programmable buttons 10 pages keys for switching programmable buttons
Interface	1 x 10/100 BaseT RJ45 for connecting IP phone (IP580 or IP590)
Dimensions	240x220x60 mm (9.4x8.6x2.3 in)
Weight	0.65 kg (1.43 lb)
Power Input	DC 12V 1.5A adapter
Temperature	0°C ~ 50°C (32°F ~ 122°F)
Humidity	18% to 90% (non-condensing)

For more information, please visit [www.dsg.com.tw](http://www.dsg.com.tw)

### Corporate Headquarters

7F, 222 Cheng Teh Road, Sec. 4,  
Taipei, Taiwan 111  
Tel : 886-2-88615558  
Fax : 886-2-88615557  
E-Mail : [sales@dsg.com.tw](mailto:sales@dsg.com.tw)