

## Today's Computer Telephony Solution

# VL880 PLUS

## Powerful & Affordable Voice Mail System

DSG Technology, with over 10 years of hardware and software experiences and technical expertise on voice processing systems, proudly presents VL880 Voice Mail System. VL880 is an embedded voice mail system supporting up to 8 ports of voice mail channels. It is a stand-alone system and easy to use. VL880 is the ideal solution for today's business communication needs.

### Advanced Voice Communication Solution

DSG VL880 integrates auto attendant and voice mail system in one compact device. It allows nearly every small business to benefit from a voice mail system. The voice guidance programming and remote access make VL880 easy for installation and maintenance. VL880 supports in-band DTMF and SMDR signals. It is compatible with almost all brands of PBX. The flexible call flow design allows businesses to customize their own different needs.

With abundant benefits and high reliability, VL880 is a voice mail system that not only maximizes the use of your existing phone system, but also enhances the efficiency and competitiveness of your operation. It is the ideal voice messaging tool to improve work flow and employee productivities.

- Advanced DSP Technologies
- Windows-Based Management Utility
- Support Remote Telephone DTMF Programming
- Provide 4-8 Ports of Voicemail
- Flexible Voice Message Storage
- 18 or 144Hours of Storage (256MB or 2GB Flash Memory model)
- 2700 Hours of Storage (HDD model)



# Embedded Voice Mail System

Stable, Flexible, and User-Friendly



## Features

### Auto Attendant

- Voice guidance for DTMF programming
- Support Day, Night, Break and Holiday greetings
- Provide up to 93 extension groups for different department
- Assistant operators supported
- Holiday scheduling
- Day, Night, Break, Holiday operators
- 10x10 Multi-level AA tree inquiry function
- Automatic processing tone detection
- Multilingual system prompts
- Double system password protection
- Support 6-digit extensions
- Fully integration with major brands of PBX, both DTMF and RS-232 signaling supported
- Busy re-transfer function
- Bi-weekly 2-days off supported
- Telephone programmable holidays
- Designated call pick-ups
- Live monitoring function

### Voice Mail System

- Customized personal greeting and busy greeting
- Messages forwarding feature supported
- Distributing messages to groups
- Personal name announcement for call transfer
- Playback speed control
- Playback volume control
- Extension notification of new messages
- Voice guidance programming
- Pager notification
- Light up message LED indicator on phone set (requires PBX supporting)
- External call forward
- External notification to PSTN
- Day, Night, Break, Holiday mode LED indication
- Remotely enable or disable voicemail boxes
- Security mode button
- Channel status indication
- Automatic purging of messages
- Security mode LED indication
- Silence compression auto detection
- Up to 999,999 mailboxes per system
- Voice storage capacity from 18 to 2700 hours
- Live recording function (requires PBX supporting)
- Switch Day, Night, Break, Holiday mode automatically, manually, and remotely
- Bilingual personal mailbox prompts
- Support TCP/IP network configuration
- Wake Up Call
- System status and traffic report
- Support Win2000, WinXP, Vista and Win7
- Support online upgrade function


## Today's Computer Telephony Solution



## Specifications

Dimensions	31.5mm x 198mm x 60mm (12.4" x 7.8" x 2.36")
Weight	2.0kg (Approximately 4.5 lb)
Power Input	DC 12V 4.16A
Temperature	0°C ~ 50°C (32°F ~ 122°F)
Humidity	10% ~ 90% (Non-condensing)
Internal RAM	64 MB
Storage	40 GB Hard Disk, 256 MB or 2GB Flash Disk
Capacity	4-8 ports

For more information, please visit [www.dsg.com.tw](http://www.dsg.com.tw)

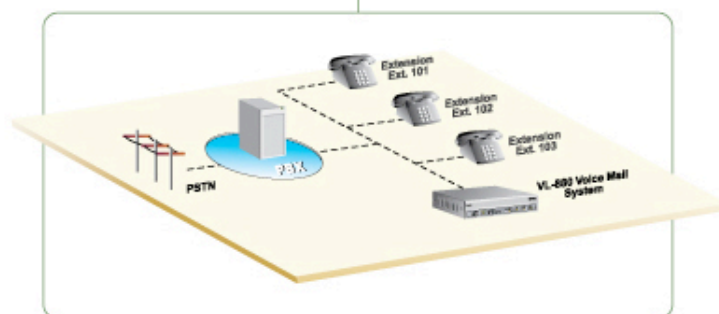

This publication is intended for reference purposes only. All product specifications are subject to change without notice. No part of this publication may be reproduced in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission of DSG Technology.

All brand names and product names are trademarks or registered trademarks of their respective companies.

### Corporate Headquarters

7F, 222 Cheng Teh Road, Sec. 4,  
Taipei, Taiwan 111  
Tel : 886-2-88615558  
Fax : 886-2-88615557  
E-Mail : [sales@dsg.com.tw](mailto:sales@dsg.com.tw)

 **DSG TECHNOLOGY**

10VL88DE.A © Copyright 2010 DSG Technology, Inc.